

## WSD-6012A/7012A


## Vandal proof IR Dome Camera



## Key Features

- ▶ Vandal proof IR Dome Camera
- ▶ 1/3" color CCD SONY Effio-E
- ▶ 30pcs  $\phi$  5mm IR-LED, IR Range 25 M
- ▶ OSD Function: 3D-DNR, HBLC/ D-WDR, AGC, Sense-up
- ▶ 3-Axis Design, easy for installation
- ▶ Built-in 2.8-12 Manual Zoom Lens
- ▶ IR Bullet Day /Night
- ▶ Water Resistance IP 66

## Dimension

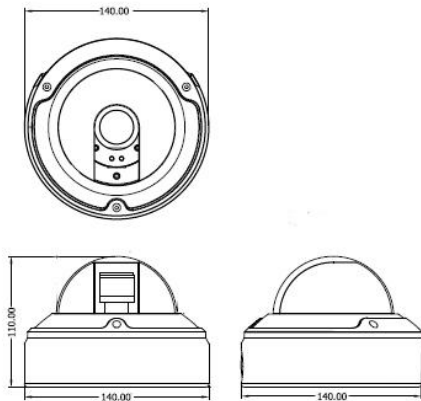

## Technical Specification

Model	WSD-6012A	WSD-7012A
Image Device	1/3"COLOR SONY Effio-E	
Horizontal Resolution	650TVL	700TVL
Picture Element	NTSC : 768(H) $\times$ 494(V) / PAL : 752(H) $\times$ 582(V)	
IR Led & IR Range	30 pcs with $\phi$ 5 IR Led	
Min. Illumination	0.001 Lux @ F2.0/ 0 Lux @ IR On	
Lens Furnished	Built-in 2.8- 12 mm. Manual Zoom Lens	
Scanning Mode	PAL/NTSC	
Illuminate Distance	25 M	
Electronic Shutter	NTSC : 1/60 ~1/150,000s, PAL : 1/50 ~1/110,000s	
S/N Ratio	More than 50dB	
Gamma	0.45	
Scanning System	2:1 Interface	
Exposure	Auto	
Auto Gain Control (AGC)	OFF/ LOW/ MIDDLE/ HIGH	
White Balance	ATW / AWB / INDOOR / OUTDOOR / MANUAL / AWC	
Mirror	ON/ OFF	
Motion Detection	OFF/ON	
Privacy Masking	OFF/ON (8 Zone)	
Day & Night Mode	AUTO/ COLOR/ B&W/ EXT	
3DNR	OFF/ LOW/ MIDDLE/ HIGH	
D-WDR	Yes	
Sync. System	Internal	
Video Output	1 Vp-p / 75 Ohms	
Protocol	Pelco-D	
Power Supply	DC12V $\pm$ 10%/ 450mA	
Operation Temperature	-10 $^{\circ}$ C ~ +45 $^{\circ}$ C RH95% Max	
Storage Temperature	-30~+60 $^{\circ}$ C RH95% MAX	
Dimension	$\phi$ 140 x 110 (H) mm	
Weight	2000g	