

ACTC-1336PK

1.3 MP AHD/CVBS/CVI/TVI Dome Camera


Technical Specification



Key Features

- ▶ Indoor Dome Multi Camera AHD/CVBS/CVI/TVI.
- ▶ 1.3MP 1/3" H65 + V20E (FH8532E) CMOS Sensor.
- ▶ IR LED: 3PCS IR Array LEDs, IR range: 20M.
- ▶ Video Output 960P@25/30fps.
- ▶ Day/Night (ICR), AWB, AGC, BLC, DNR.
- ▶ High speed Long Distance Real-Time Transmission.
- ▶ Board Lens 3.6mm (6mm is Optional).
- ▶ Support DIP Switch 4 mode of video output signal (AHD/ TVI/ CVI/ CVBS).
- ▶ Ingress Protection: IP65.
- ▶ Advanced H.264 High profile compression.
- ▶ Dimensions: $\Phi 110 \times 98\text{mm}$.
- ▶ Weight: 300g.

DIP Switch

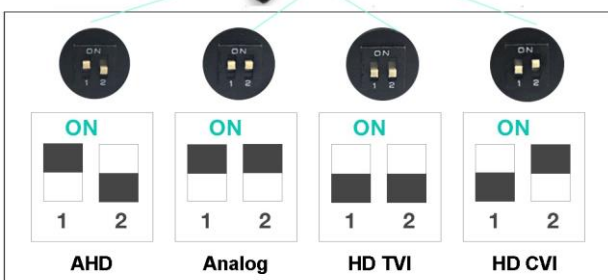

Model	ACTC-1336PK
Camera	
Image Device	1/3" 1.3 Megapixel CMOS Sensor
CMOS Sensor	H65
DSP Device	Fullhan V20E (FH8532E)
Effective Pixel	1280(H) x 960(V)
Scanning System	Progressive Scan
Synchronization	Internal
Electronic Shutter	AUTO/1/50(1/60) ~ 1/50,000sec
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR ON
S/N Ratio	More than 41dB
Video Output	AHD/CVI/TVI : 960P, CVBS : 960H
Transmission Distance	Over 500 meters via 75-3 coaxial cable
Camera Features	
Infrared LED	3PCS IR Array LEDs $\Phi 28\text{u}$.
Max. IR LEDs Length	IR Range 20M
Day/Night	EXT (Default)/ AUTO/ Color/ B/W
Backlight Compensation	AUTO
White Balance	AUTO
Gain Control	AUTO
Noise Reduction	Adjustable
Contrast	Adjustable
DWDR	ON/OFF
Camera Title	N/A
Motion Detection	N/A
Privacy Masking	N/A
Ultra Defog	N/A
Lens	
Pixel	3.0 Megapixel
Image Format	1/2.7"
Wavelength	850nm
Focal Length	3.6mm ICR Lens (6mm is Optional)
Max Aperture	F2.6
Focus	N/A
Zoom	N/A
Field Angle (DxHxV)	1/2.7" 120°x96°x72°
	1/3" 104°x83.2°x62.4°
	1/4" 74°x59.2°x44.4°
IRIS	Fied
Mount Type	M12
Video	
Compression	H.264 High profile
Resolution	960P (1280x960)
Video Frame Rate	1.3MP/960P (1~25/30fps)
Bit Rate	H.264: 32K ~ 8192Kbps
TV System	PAL/NTSC (Customized)
Video Space	1 Hour = 900MB
Video Output	1 Vp-p/75 Ohms
Auxiliary Interface	
Audio	N/A
RS485	N/A
Alarm	N/A
OSD Manu	N/A
OSD Language	N/A
Video Signal Switch	DIP Switch 4 Mode of video output signal
Bracket	N/A
General	
Power Supply	DC 12V \pm 10% 420mA
Power Consumption	Max 5W
Working Environment	-10°C ~ +50°C / Less than RH95% (no condensation)
Ingress Protection	IP65
Vandal Resistance	N/A
Dimensions	$\Phi 110 \times 98\text{mm}$.
Weight	300g