

## ACTC-1336CH

### 1.3 MP AHD/CVBS/CVI/TVI Bullet Camera



### Technical Specification



### Key Features

- ▶ Waterproof IR Bullet 4 in 1 AHD/CVBS/CVI/TVI Multi Camera.
- ▶ 1.3MP 1/3" H65 + V20E (FH8532E) CMOS Sensor.
- ▶ IR LED:  $\Phi 5 \times 30$ PCS, IR range: 25M.
- ▶ Video Output 960P@25/30fps.
- ▶ Day/Night (ICR), AWB, AGC, BLC, DNR.
- ▶ High speed Long Distance Real-Time Transmission.
- ▶ Board Lens 3.6mm (6mm is Optional).
- ▶ Support DIP Switch 4 mode of video output signal (AHD/ TVI/ CVI/ CVBS).
- ▶ Ingress Protection: IP66.
- ▶ Advanced H.264 High profile compression.
- ▶ Dimensions: 185 x 66mm.
- ▶ Weight: 700g.

### DIP Switch

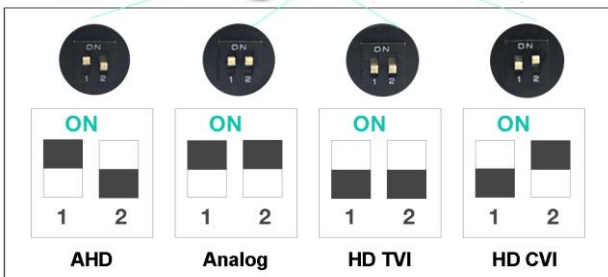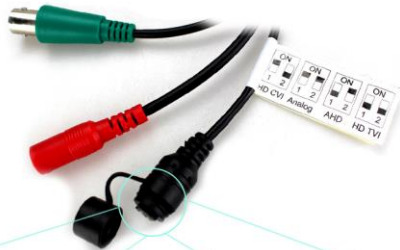

Model	ACTC-1336CH
<b>Camera</b>	
<b>Image Device</b>	1/3" 1.3 Megapixel CMOS Sensor
<b>CMOS Sensor</b>	H65
<b>DSP Device</b>	Fullhan V20E (FH8532E)
<b>Effective Pixel</b>	1280(H) x 960(V)
<b>Scanning System</b>	Progressive Scan
<b>Synchronization</b>	Internal
<b>Electronic Shutter</b>	AUTO/1/50(1/60) ~ 1/50,000sec
<b>Min. Illumination</b>	0.01Lux@F1.2(AGC ON), 0Lux IR ON
<b>S/N Ratio</b>	More than 41dB
<b>Video Output</b>	AHD/CVI/TVI : 960P, CVBS : 960H
<b>Transmission Distance</b>	Over 500 meters via 75-3 coaxial cable
<b>Camera Features</b>	
<b>Infrared LED</b>	$\Phi 5 \times 30$ PCS IR LEDs
<b>Max. IR LEDs Length</b>	IR Range 25M
<b>Day/Night</b>	EXT (Default)/ AUTO/ Color/ B/W
<b>Backlight Compensation</b>	AUTO
<b>White Balance</b>	AUTO
<b>Gain Control</b>	AUTO
<b>Noise Reduction</b>	Adjustable
<b>Contrast</b>	Adjustable
<b>DWDR</b>	ON/OFF
<b>Camera Title</b>	N/A
<b>Motion Detection</b>	N/A
<b>Privacy Masking</b>	N/A
<b>Ultra Defog</b>	N/A
<b>Lens</b>	
<b>Pixel</b>	3.0 Megapixel
<b>Image Format</b>	1/2.7"
<b>Wavelength</b>	850nm
<b>Focal Length</b>	3.6mm ICR Lens (6mm is Optional)
<b>Max Aperture</b>	F2.6
<b>Focus</b>	N/A
<b>Zoom</b>	N/A
<b>Field Angle (DxHxV)</b>	1/2.7" 120°x96°x72°
	1/3" 104°x83.2°x62.4°
	1/4" 74°x59.2°x44.4°
<b>IRIS</b>	Fied
<b>Mount Type</b>	M12
<b>Video</b>	
<b>Compression</b>	H.264 High profile
<b>Resolution</b>	960P (1280x960)
<b>Video Frame Rate</b>	1.3MP/960P (1~25/30fps)
<b>Bit Rate</b>	H.264: 32K ~ 8192Kbps
<b>TV System</b>	PAL/NTSC (Customized)
<b>Video Space</b>	1 Hour = 900MB
<b>Video Output</b>	1 Vp-p/75 Ohms
<b>Auxiliary Interface</b>	
<b>Audio</b>	N/A
<b>RS485</b>	N/A
<b>Alarm</b>	N/A
<b>OSD Manu</b>	N/A
<b>OSD Language</b>	N/A
<b>Video Signal Switch</b>	DIP Switch 4 Mode of video output signal
<b>Bracket</b>	3-Axis Bracket
<b>General</b>	
<b>Power Supply</b>	DC 12V±10% 420mA
<b>Power Consumption</b>	Max 5W
<b>Working Environment</b>	-10°C ~ +50°C / Less than RH95% (no condensation)
<b>Ingress Protection</b>	IP66
<b>Vandal Resistance</b>	N/A
<b>Dimensions</b>	185 x 66mm.
<b>Weight</b>	700g