

ACTC-2036CK

2.0 MP AHD/CVBS/CVI/TVI Bullet Camera



Technical Specification



Key Features

- ▶ Waterproof IR Bullet 4 in 1 AHD/CVBS/CVI/TVI Multi Camera.
- ▶ 2.0MP 1/2.9" IMX323 + V30E (FH8536E) CMOS Sensor.
- ▶ IR LED: $\Phi 5 \times 36$ PCS, IR range: 30M.
- ▶ Video Output 1080P@25/30fps.
- ▶ Day/Night (ICR), ATW, MWB, AGC, BLC, 3DNR.
- ▶ Advanced H.264 High profile compression.
- ▶ High speed Long Distance Real-Time Transmission.
- ▶ Board Lens 3.6mm (6mm is Optional).
- ▶ Support OSD line 4 kinds of video output signal (AHD/ TVI/ CVI/ CVBS).
- ▶ Ingress Protection: IP66.
- ▶ 3-Axis Bracket, Hidden Cable Design.
- ▶ Dimensions: 200 x 87 x 70mm.
- ▶ Weight: 900g.

Dimensions

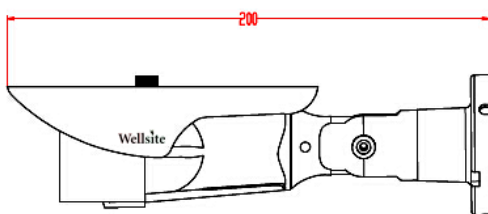

Model	ACTC-2036CK
Camera	
Image Device	1/2.9" SONY 2.0 Megapixel CMOS Sensor
CMOS Sensor	SONY IMX323
DSP Device	Fullhan V30E (FH8536E)
Effective Pixel	1920(H) x 1080(V), 1080P
Scanning System	Progressive Scan
Synchronization	Internal
Electronic Shutter	AUTO/1/50(1/60) ~ 1/50,000sec
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR ON
S/N Ratio	More than 41dB
Video Output	AHD/CVI/TVI : 1080P, CVBS : 2000TVL
Transmission Distance	Over 500 meters via 75-3 coaxial cable
Camera Features	
Infrared LED	$\Phi 5 \times 36$ PCS IR LEDs
Max. IR LEDs Length	IR Range 30M
Day/Night	EXT (Default)/ AUTO/ Color/ B/W
Day/Night Mode	Infrared/Internal AUTO/COLOR/B&W
Backlight Compensation	AUTO
White Balance	ATW/MWB
Gain Control	AUTO
Noise Reduction	3DNR
DWDR	ON/OFF/AUTO
Exposure	BRIGHTNESS/EXPOSURE MODE/GAIN
Video Setting	Contrast/Sharpness/COLOR GAIN/DNR/Format/DWDR
Motion Detection	N/A
Privacy Masking	N/A
Lens	
Pixel	3.0 Megapixel
Image Format	1/2.7"
Wavelength	850nm
Focal Length	3.6mm ICR Lens (6mm is Optional)
Max Aperture	F2.6
Focus	N/A
Zoom	N/A
Field Angle (DxHxV)	1/2.7" 120°x96°x72°
	1/3" 104°x83.2°x62.4°
	1/4" 74°x59.2°x44.4°
IRIS	Fied
Mount Type	M12
Video	
Compression	H.264 High profile
Resolution	1080P (1920x1080)
Video Frame Rate	2.0MP/1080P (1~25/30fps)
Bit Rate	H.264: 32K ~ 8192Kbps
TV System	PAL/NTSC (Customized)
Video Output	1 Vp-p/75 Ohms
Auxiliary Interface	
Audio	N/A
RS485	N/A
Alarm	N/A
OSD Manu	Yes
OSD Language	ENGLISH/CHN1/ESPAÑOL/FRANCAIS/CHN2/Pyckknn/ ITALIANO/EAAHNKA/Korean/Portugues
Video Signal Switch	OSD line 4 kinds of video signal
Bracket	3-Axis Bracket
General	
Power Supply	DC 12V±10% 420mA
Power Consumption	Max 5W
Working Environment	-20°C ~ +50°C / Less than RH95% (no condensation)
Ingress Protection	IP66
Vandal Resistance	N/A
Dimensions	200 x 87 x 70mm.
Weight	900g